OVAL ACCESS DOORS

MODELS: ACC8X5, ACC12X6, ACC18X10, ACC22X14, ACC26X18



FEATURES

Oval shape Access doors for ease of Installation.

Cut-out template is provided.

Suitable for insulated or uninsulated duct.

STANDARD CONSTRUCTION

Galvanized Steel construction

Door: It is two die-formed and has seamless panels in a sandwich construction.

Frame: Die-formed and seamless.

Positive Cam lock fastenings.

One piece extruded gasket for positive seal.

Thermal, Acoustic and Fire-retardant insulation.

Pre-punched holes in both flanges of frame.

OPTIONS

- ☐ Retaining Chain
- ☐ Model ACC8X5
- ☐ Model ACC12X6
- ☐ Model ACC18X10
- ☐ Model ACC22X14
- ☐ Model ACC26X18


NOTES

Camlock is available in galvanized steel finish only

MODEL	O805		1206	
NOM. SIZE	200X125 (mm)	8X5 (In)	300X150 mm	12X6 (in)
A	200	7 7/8	300	11 7/8
B	125	5	150	6
C	240	9 1/2	350	13 1/4
D	165	6 1/2	200	7 7/8

Model	No. per Carton	Carton Size
ACC8x5	20	20"x16"x7.75"
ACC12x6	10	16.75"x14.5"x8.75"
ACC18x10	10	20.75"x16.75"x13"
ACC22x14	5	24.75"x16.5"x9.5"
ACC26x18	4	28.75"x20.5"x7.75"

MODEL	1810		2214		2618	
NOM. SIZE	460X250 (mm)	18X10 (In)	550X350 (mm)	22X14 (In)	650X450 (mm)	26X18 (In)
A	460	18 1/4	550	21 5/8	650	25 5/8
B	260	10 1/4	350	13 3/4	450	17 3/4
C	500	19 5/8	590	23 1/4	690	27 1/8
D	300	11 7/8	400	15 3/4	500	19 5/8

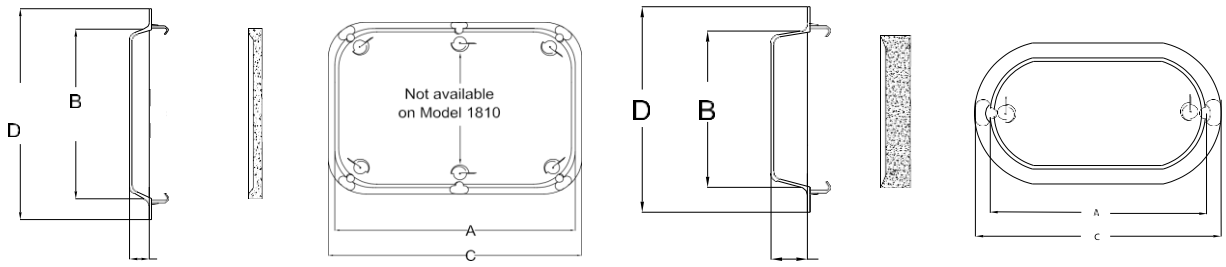

Brisk Mfg Inc.
5915 Wallace Street, Mississauga
L4Z 1Z8 ON, Canada
Website: www.briskmfg.com

"ALL STATED SPECIFICATIONS ARE SUBJECT TO UPDATE WITHOUT NOTICE OR OBLIGATION.

Tel: 905-206-6888
Email: info@briskmfg.com