
STATIC CURTAIN TYPE FIRE DAMPER

MODEL: AMI-75AH & AMI-75AV

APPLICATION

The model **AMI-75AH & AMI-75AV** is UL555 Static Fire Rated for "fans off" systems and has been UL tested and labeled for use in walls, floors, and partitions with fire resistance ratings less than 2 hours. The model carries a **1-1/2 hour** UL fire damper label.



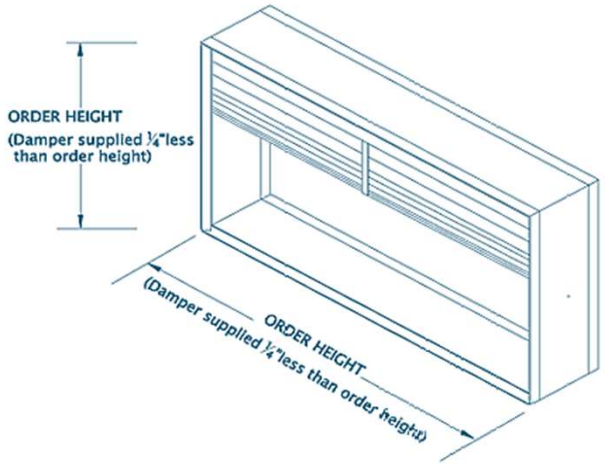

RATING

Underwriter Laboratories (UL555)
Classified Fire Dampers
Fire resistance rated 1.5 Hours
For use in UL Classified building materials rated 2 Hours or less

CAN/ULC-S112 **UL CLASSIFIED:** 1 ½ Hrs

STANDARD CONSTRUCTION

1. UL listed link (165°F)
2. Blades 22 ga. Interlocking steel blades "In Air stream"
3. Roll-formed Steel Frame 22 ga.
4. Mill finish
5. Closure Spring - Negator Stainless Steel

OPTIONS


- ☐ Vertical mount
- ☐ Horizontal mount
- ☐ 212 deg F Fusible link
- ☐ 304 Stainless Steel construction
- ☐ 316 Stainless Steel construction

DAMPER SIZES


Minimum size:
Vertical & Horizontal: 4"x4"(100mm x 100mm)

Maximum size:
Single Section
Vertical: 60"x60" (1524mm x 1524mm)
Horizontal: 34" x 60" (863.6mm x 1524mm)

Multiple section
Vertical: 120" x 120"
Horizontal: 102" x 60"

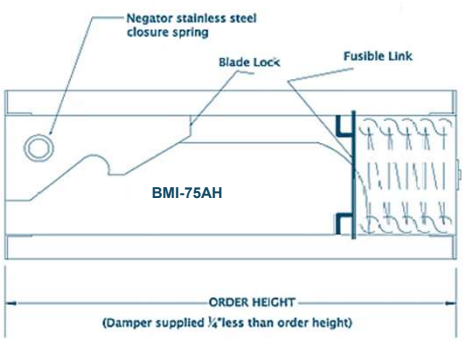

(H) HORIZONTAL MOUNT
HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS

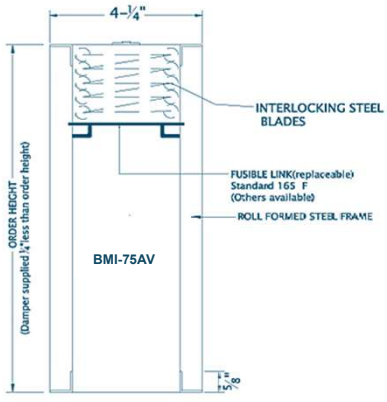

(V) VERTICAL MOUNT

Brisk Mfg Inc.
5915 Wallace Street, Mississauga
L4Z 1Z8 ON, Canada
Website: www.briskmfg.com

Tel: 905-206-6888
Email: info@briskmfg.com

"ALL STATED SPECIFICATIONS ARE SUBJECT TO UPDATE WITHOUT NOTICE OR OBLIGATION.