SQUARE AND RECTANGULAR INSULATED ACCESS DOORS

MODEL: ASR-C, ASR-H

DESCRIPTION

Model **ASR-C**: Insulated Access doors
Model **ASR-H**: Insulated Access doors with hinge

24- gauge frame and double panel galvanized steel door, gauge depends on size.

Notched knock - over.

High density, closed cell gasket, bonds the door to the frame.

Model **ASR-C, ASR-H** are complete with two (2) camlocks and four (4) may be required on large doors.

Safety retaining chain is available as an option.

Doors are complete with continuous piano type hinge on one side and one (1) or two (2) camlocks on the opposite side for sizes up to 14".

Over 14" same continuous hinge on one side, and two (2) camlocks on the other.

Meets **SMACNA** specifications.

Any size up to 44x44 can be manufactured.

Door c/w 1" (25mm) or 2" (50mm) insulation.

STANDARD CONSTRUCTION

- **Frame:** 24 GA. galvanized steel
- **Door Panel:** 24 GA. galvanized steel
- **Finish:** Galvanized steel
- 1" Thick hinged access door with flange Frame
- 1" Outboard flange all(4) sides
- 1/8' X 1-1/2' Pressure sensitive foam tape (4) sides
- 1/8" X 1/2" Inside door seal





OPTIONS


- ☐ Retaining Chain
- ☐ Model ASR-C
- ☐ Model ASR-H
- ☐ 304 Stainless Steel construction
- ☐ 316 Stainless Steel construction


NOTES

Camlock is available in galvanized steel finish only

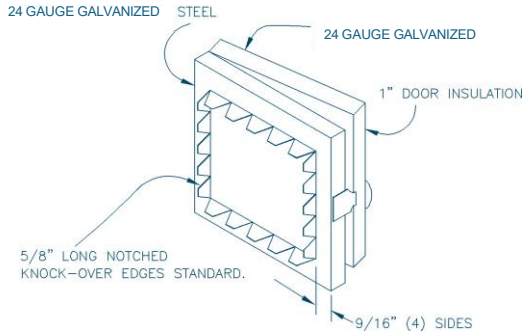

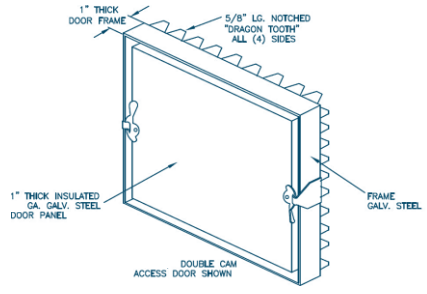

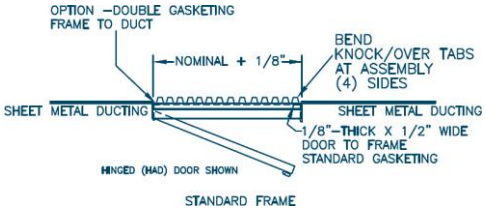

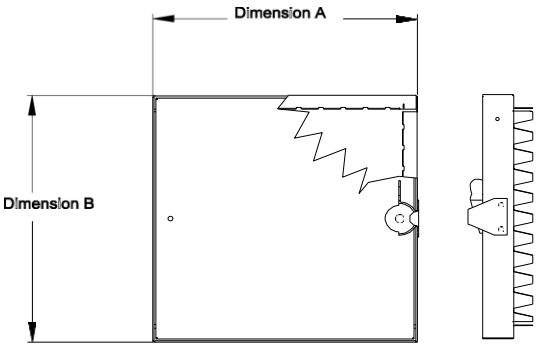

"ALL STATED SPECIFICATIONS ARE SUBJECT TO UPDATE WITHOUT NOTICE OR OBLIGATION.