
THERMAL BLANKET

MODEL: CTB



SPECIFICATION:

Thermal Blankets are commonly used on CRD's of area greater than 84 square inches.

MATERIAL:
1/4" thick 6-pound density Ceramic fiber used for Fire Dampers.
1/2" thick 8 pound density Ceramic fiber used for U.L Classified Ceiling Radiation Dampers


AVAILABLE SIZES:
12" x 12"
12" x 24"
24" x 24"

NOTE:
Custom sizes available

FOR STEEL INSTALLATION ON THE BACK OF STEEL:
"lay-in" diffusers, or tapered neck diffusers in ceiling applications.

RATING

CAN/ULC-S112

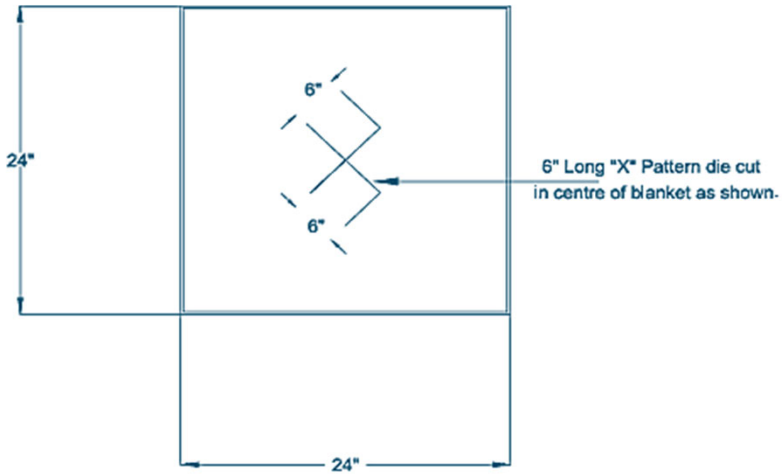

Brisk Mfg Inc.
5915 Wallace Street, Mississauga
L4Z 1Z8 ON, Canada
Website: www.briskmfg.com

Tel: 905-206-6888
Email: info@briskmfg.com

"ALL STATED SPECIFICATIONS ARE SUBJECT TO UPDATE WITHOUT NOTICE OR OBLIGATION.