SQUARE AND RECTANGULAR ACCESS DOORS C/W FLANGE FRAME & DOUBLE CAM LOCKS

DESCRIPTION

Model **PAA**: 1" insulation c/w Flange & Double Cam Lock
Model **PAB**: 2" insulation c/w Flange & Double Cam Lock

24- gauge flanged frame and double panel galvanized steel door, gauge depends on size.

Notched knock - over.

High density, closed cell gasket, bonds the door to the frame.

Model **PAA & PAB** are complete with two (2) camlocks and four (4) may be required on large doors.

Safety retaining chain is available as an option.

Doors are complete with continuous piano type hinge on one side and one (1) or two (2) camlocks on the opposite side for sizes up to 14".

Over 14" same continuous hinge on one side, and two (2) camlocks on the other.

Meets **SMACNA** specifications.

Any size up to 44x44 can be manufactured.


Door c/w 1" (25mm) or 2" (50mm) insulation.

STANDARD CONSTRUCTION

- **Frame:** 24 GA. galvanized steel
- **Door Panel:** 24 GA. galvanized steel
- **Finish:** Galvanized steel
- 1" Thick hinged access door with flange Frame
- 1" Outboard flange all(4) sides
- 1/8' X 1-1/2' Pressure sensitive foam tape (4) sides
- 1/8" X 1/2" Inside door seal

Dimension A	Dimension B
6x6	5x11
8x8	7x11
6x12	9x9
8x12	11x11
10x10	11x17
12x12	13x13
12x18	17x17
14x14	19x19
16x16	23x23
20x20	
24x24	

MODEL: PAA, PAB

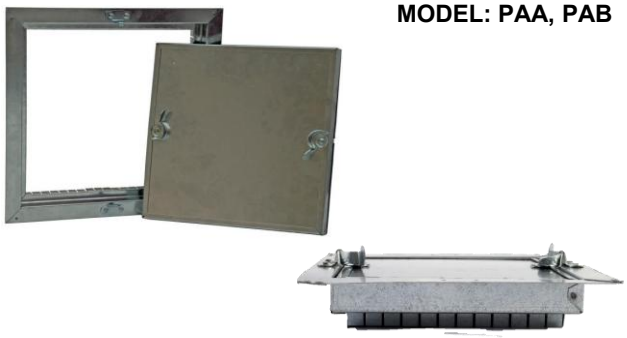



OPTIONS


- ☐ Retaining Chain
- ☐ Model PAA
- ☐ Model PAB
- ☐ 304 Stainless Steel construction
- ☐ 316 Stainless Steel construction

NOTES

Camlock is available in galvanized steel finish only

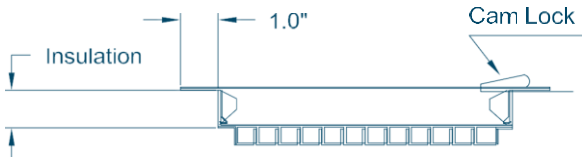



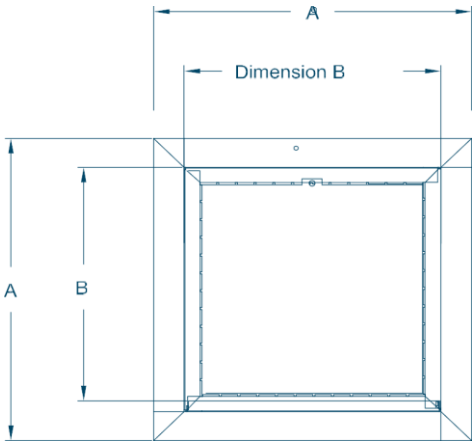

"ALL STATED SPECIFICATIONS ARE SUBJECT TO UPDATE WITHOUT NOTICE OR OBLIGATION.